





FRONT SPRINGS			
M	LOAD LBS.	RATE LBS. PER SPRG. PER INCH	SPRG. NO.
12 1/2	2200	579	125068
13 1/2	2600	796	1251161

REAR SPRINGS			
L	LOAD LBS.	RATE LBS. PER SPRG. PER INCH	SPRG. NO.
14 1/2	7000	2825	576735
14 7/8	8500	3420	924313

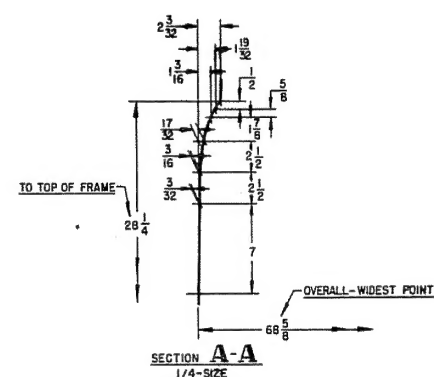

TIRE SIZE	RIM SIZE	A	B	C	D	E	F	G	H	P
7.50/20 10P	20X6	70 1/2								
8.25/20 10P	20X6	70 1/2								
8.25/20 12P	20X6	70 1/2								
9.00/20 10P	20X7	68 3/4								
10.00/20 12P	20X7	68 3/4								
10.00/20 12P	20X8	68 1/2								
11.00/20 12P	20X8	68 1/2								
8.25/20 10P	20X6	11	2.07	70 3/8	7.86	25.22	18.07	4	90.30	
8.25/20 12P	20X6	11	2.07	70 3/8	7.86	25.22	18.14	4	90.30	
9.00/20 10P	20X7	13	2.75	70 3/8	8.81	23.56	18.89	4	93.62	
10.00/20 12P	20X7	13	2.38	70 3/8	9.61	23.37	19.68	4 1/2	94.00	
11.00/20 12P	20X8	12.84	1.53	70 3/8	10.26	22.11	21.10	4 1/2	94.52	

NOTE: ABOVE CHART FOR PROD. 21000* G.V.W. JOBS
FOR EX. EQ. 23000* G.V.W. JOBS ADD 1/2" TO "D", "E", "F", "G" AND 1/4" TO "H"

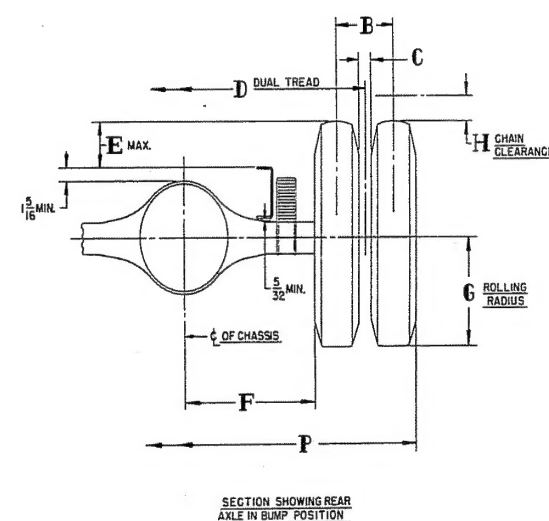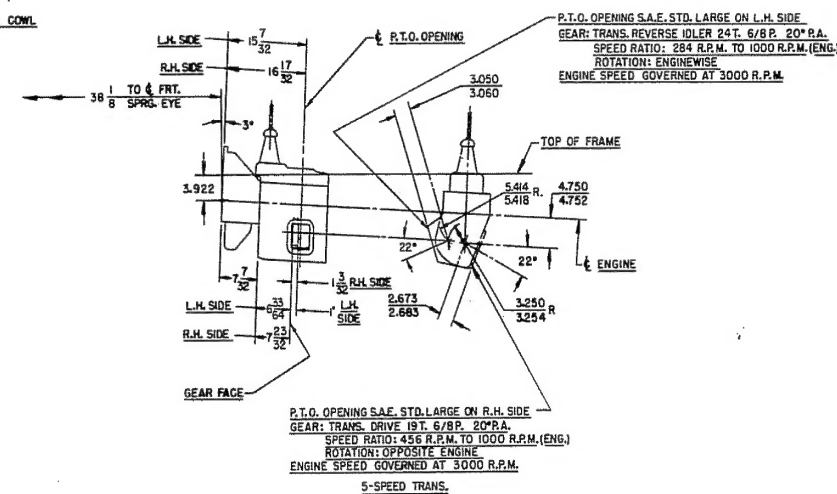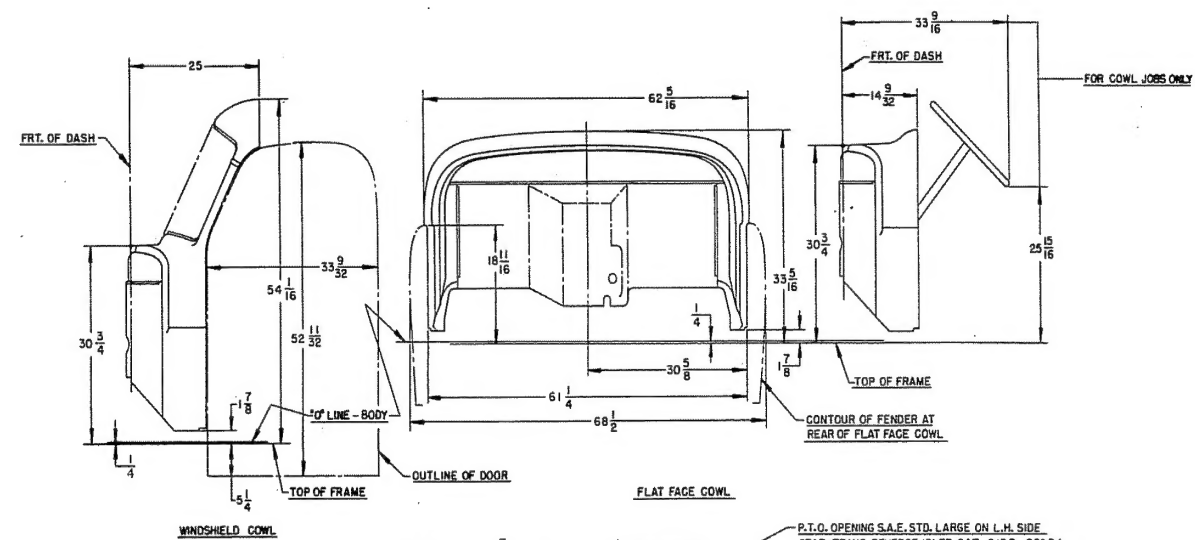

BODY BUILDERS LAYOUT
T, TA, V, VA 130" 136" W.B. (TRACTOR)

T, TA, V, VA